



Gea LED Signaling ø60mm

LedsC4 Team

Recessed uplighting IP65-IP67 Gea LED Signaling ø60mm LED 2.2 LED warm-white 3000K ON-OFF Anodised aluminium 52lm

Technical features

Luminaire total power: 2.2W
Real lumens: 52
Real lm/W: 24
Correlated Colour Temperature (CCT): LED warm-white 3000K
Lens / reflector angle: FLOOD 96°
Structure material: Aluminium
Structure finish: Anodised aluminium
Diffuser material: Glass
Diffuser finish: Tinted
Voltage / frequency: 100-240VAC/50-60Hz
Dimming protocol: ON-OFF
Power Factor: 0.40
Useful life: 50,000h L80B20
Warranty: 5 años
Resistant to marine environments: Yes
Easily recyclable luminaire



Luminotechnic features

CRI: 80
MacAdam steps: 3
Photobiological risk: RG2

Lampholder	Quantity	Light source power (W)	Correlated Colour Temperature (CCT)
LED	1	1W	LED warm-white 3000K


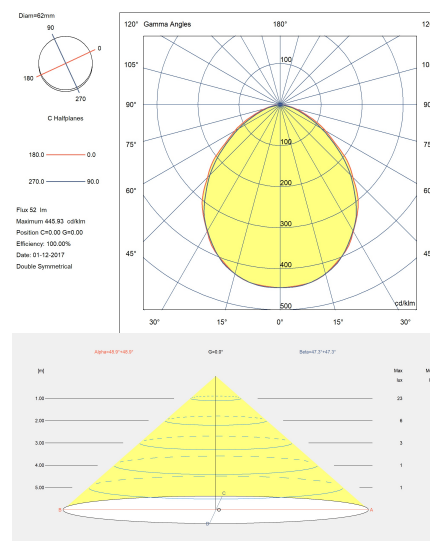


Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.

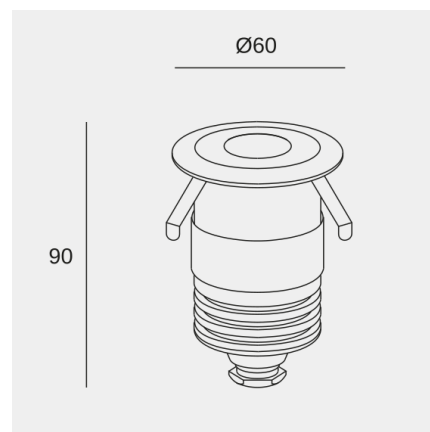


Gea LED Signaling ø60mm

LedsC4 Team

Recessed uplighting IP65-IP67 Gea LED Signaling ø60mm LED 2.2 LED warm-white 3000K ON-OFF Anodised aluminium 52lm

Logistics



x 24

Net weight (kg): 0.48

Packaged weight (kg): 0.55

Packaging: 80mm x 80mm x 125mm

Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.



Gea LED Signaling ø60mm

LedsC4 Team

Recessed uplighting IP65-IP67 Gea LED Signaling ø60mm LED 2.2 LED warm-white 3000K ON-OFF Anodised aluminium 52lm

Accessories included



Coloured interchangeable filters



Recessed box



3000K diffuser

Optional accessories



71-E112-00-00

IP68 anti-condensation connector with two inlets

Structure material: Technopolymer

Dimensions: 23 x 88 x NA

Net weight (kg): 0.04



71-E122-00-00

IP68 anti-condensation connector with four inlets

Structure material: Technopolymer

Dimensions: 54 x 88 x 28

Net weight (kg): 0.09

Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.

Optional accessories



71-9199-05-05

IP68 connector with six inlets

Structure material:
Dimensions: NA x NA x NA
Net weight (kg): 0.26



71-9262-05-05

IP67 connector with three inlets

Structure material:
Dimensions: NA x NA x NA
Net weight (kg): 0.09



71-E510-00-00

Basic Connector Mini IP67 2 inputs 3 poles Ø5.5-7.5mm

Structure material: Nylon
Dimensions: 19 x 55 x NA
Net weight (kg): 0.02



71-E511-00-00

Connector T Basic Mini IP67 3 inputs 3 poles Ø5.5-7.5mm

Structure material: Nylon
Dimensions: 19 x 77 x 52
Net weight (kg): 0.04



71-E512-00-00

Basic Medium Connector IP68 2 inputs 4 poles Ø5.5-11.5mm

Structure material: Nylon
Dimensions: 24 x 71 x NA
Net weight (kg): 0.03



71-E513-00-00

Connector T Basic Medium IP68 3 inputs 3 poles Ø5.5-11.5mm

Structure material: Nylon
Dimensions: 25 x 102 x 65
Net weight (kg): 0.08

Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.